


Model
Eisenach

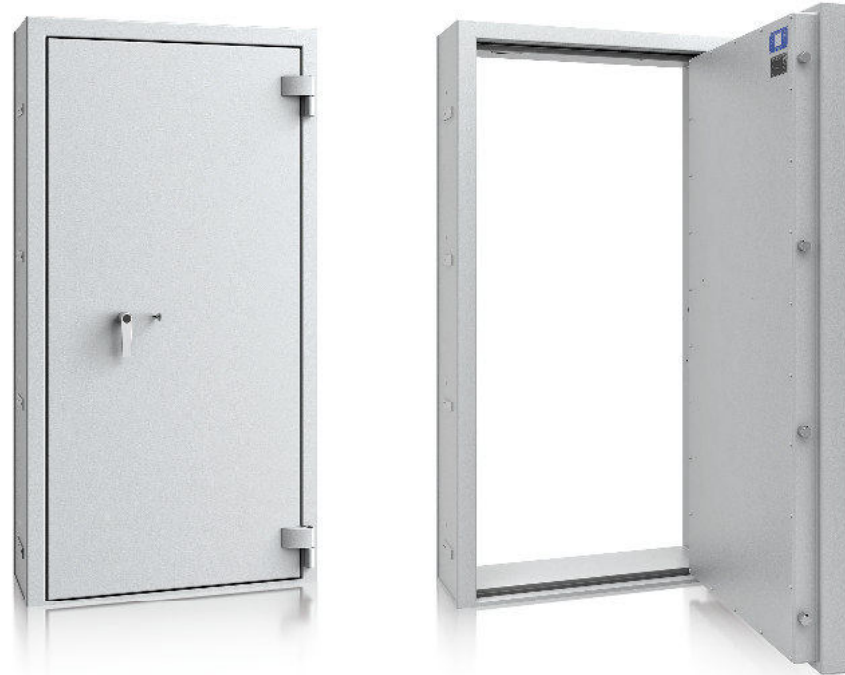

Security level: Class S2 according to EN 14450

Description:
Series Eisenach - strongroom door, burglar - proof.

Door: multi-walled door construction (104 mm thick)
Door frame: double-walled (62 mm thick)
Locking: 3-way locking bolt system - incl. overlapping profile on the hinge side

Standard option:
Lock: high security key lock class I VdS with two keys (120 mm)
Boltwork handle: handle, protruding 60 mm
Hinges: external
Door opening angle: 180°
Mounting holes: 8 holes, 4 in each side
Colour: RAL 7035 (light grey)



Model
Eisenach

Art. No.	Model	Outer dimensions*			Door light		Anchoring			Weight Kg
		Height mm	Width mm	Depth mm	Height mm	Width mm	Left Side number	Right Side number	In the top number	
55300	Eisenach	1700	900	240	1605	740	4	4	-	166
55301	Eisenach	1800	900	240	1705	740	4	4	-	175
55302	Eisenach	2000	1000	240	1905	840	4	4	-	205

* excluding hinges, handles and fittings



Door frame: double-walled (62 mm thick)




Door: multi-walled door construction (104 mm thick)

Closure options



Standard option




Key lock

Options available against surcharge



Mechanical code lock




Electronic lock




Electronic lock with mechanical emergency opening

Accessories available against surcharge



Inner blockage



Additional inside handle



Additional keypad for inside lock



RAL 7035



RAL 9006



RAL 7024

All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

